


## 4-Port Hybrid Coupler

220-222 MHz 3.3 dB IL 45 dB Isol.

### Specifications

Model Number	HH2140-220-E2632	
Frequency Range	MHz	220-222
Insertion Loss (max)	dB	3.3
VSWR (max)		1.25:1
Isolation (min)	dB	45
Termination type - Input		N-male
Termination type - Output		N-female
Temperature Range	Deg C	-30 to +60
Height	in (mm)	1.2 (30.5)
Width	in (mm)	1.4 (42.7)
Length	in (mm)	14 (356)

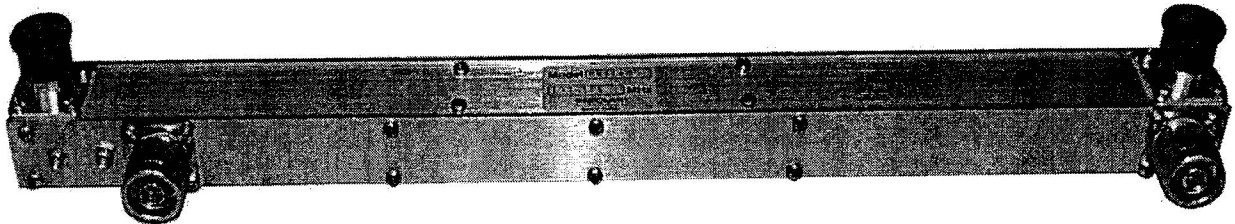

[www.sinctech.com](http://www.sinctech.com)

### Sinclair Technologies Inc.

85 Mary Street, Aurora, Ontario, Canada L4G 6X5 Tel: (800) 263-3275 Fax: (905) 727-0861

55 Oriskany Drive, Tonawanda, New York, USA 14150 Tel: (800) 288-2763 Fax: (716) 874-4007

### Sinclair Technologies Ltd.

William James House, Cowley Road, Cambridge, CB4-4WX

Tel: +44 (0) 1223 42 03 03 Fax: +44 (0) 1223 42 06 06

**SINCLAIR**

The Sinclair Policy of continuing development may result in improvement or change to this product.

M017070 Rev1.xls