




# Low Pass Filter

210-275 MHz 0.3 dB IL 45 dB Attenuation

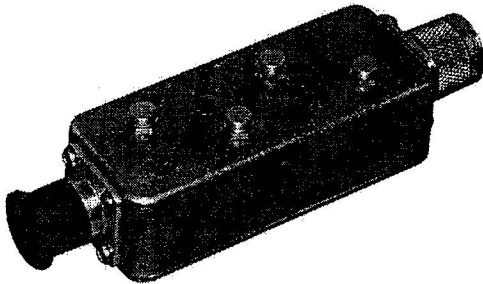

## Specifications

Model Number	HSSF-300-8172	
Frequency Range Passband	MHz	210-275
Frequency Range Reject band		500-1100
Insertion Loss Passband (max)	dB	0.3
Attenuation Reject Band (min)	dB	45
VSWR (max)		1.3:1
Power Input (max)	Watts	200
Termination type - Input		N-female
Termination type - Output		N-male
Temperature Range	Deg C	-30 to +60
Height	in (mm)	1.5 (38.1)
Width	in (mm)	1.5 (38.1)
Length	in (mm)	5.5 (140)

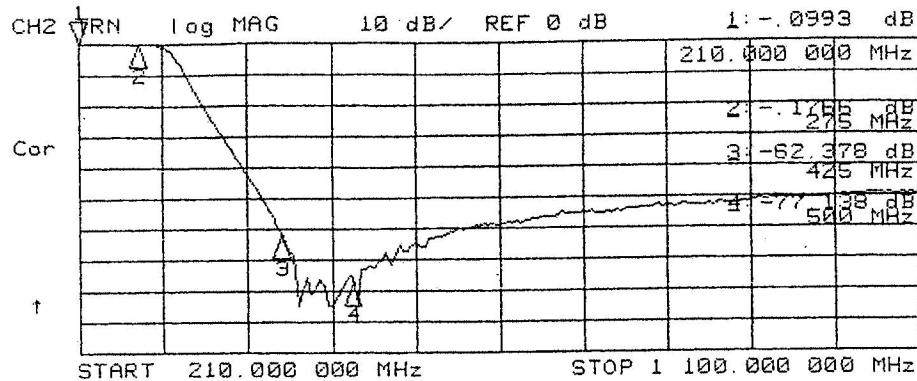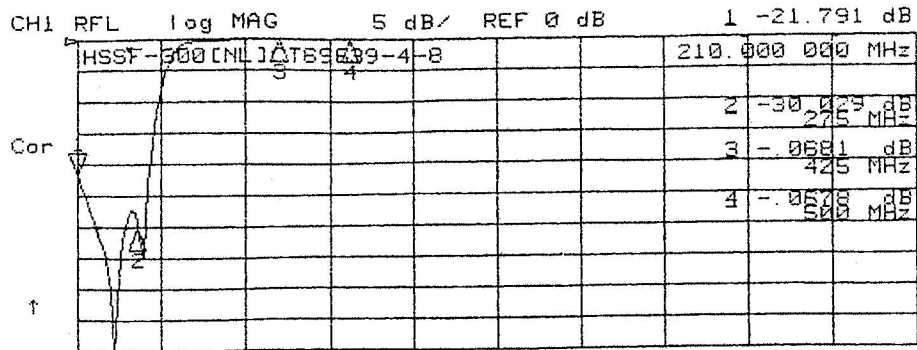

[www.sinctech.com](http://www.sinctech.com)

### Sinclair Technologies Inc.

85 Mary Street, Aurora, Ontario, Canada L4G 6X5 Tel: (800) 263-3275 Fax: (905) 727-0861

55 Oriskany Drive, Tonawanda, New York, USA 14150 Tel: (800) 288-2763 Fax: (716) 874-4007

### Sinclair Technologies Ltd.

William James House, Cowley Road, Cambridge, CB4-4WX

Tel: +44 (0) 1223 42 03 03 Fax: +44 (0) 1223 42 06 06

The Sinclair Policy of continuing development may result in improvement or change to this product.

ME2645-8172 Rev1.xls

